


Compression Conduit Cable Gland

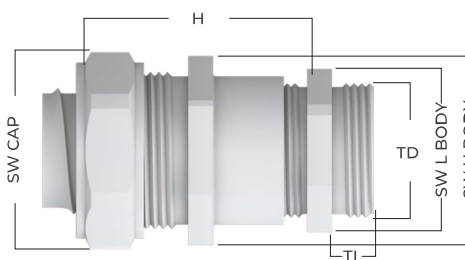

TECHNICAL INFORMATION

- CAP :** NICKEL PLATED BRASS (NPB)
- BODY :** NICKEL PLATED BRASS (NPB)
- STANDARD :** EN 62444 / 50262
- THREAD TYPE :** METRIC EN 60423 , PG DIN 40430 , NPT ANSI B1.20.1
- PROTECTION CLASS :** IP 67 / IP 68
- OPERATING TEMPERATURE :** -40°C / +120°C
- FLAMMABILITY CLASS :** UL94 V2
- COLOR :** SELF-COLOURED
- Seal Type :** TPV
- Insert :** PA6
- O-RING :** NBR

FEATURES

- BEST GRADE MATERIAL | HIGH MECHANICAL STRENGTH |
- WATERPROOF | VIBRATION RESISTANT | DOUBLE FUNCTION

APPLICATIONS

- MACHINE BUILDINGS | AUTOMATION SYSTEMS |
- CONSTRUCTION | MARINE , SHIPYARD

Metric Thread

CODE	THREAD SIZE	CLAMBLING RANGE (MM)	CONDUIT NOM. SIZE (MM)	TD (MM)	TL (MM)	SW UPPER BODY (MM)	SW LOWER BODY (MM)	SW CAP (MM)	H (MM)	QUANTITY (PC/ PACK)
BRMR-M16	M16X1,5	4,0-8,0	16,0	16,0	12,0	24,0	18,0	26,0	48,0	50
BRMR-M20S	M20X1,5	5,0-10,0	16,0	16,0	12,0	24,0	22,0	26,0	50,0	50
BRMR-M20	M20X1,5	6,0-12,0	20,0	20,0	12,0	27,0	22,0	29,0	53,0	50
BRMR-M25	M25X1,5	10,0-14,0	20,0	20,0	12,0	27,0	27,0	29,0	55,0	25
BRMR-M32	M32X1,5	13,0-18,0	25,0	25,0	12,0	33,0	34,0	35,0	60,0	25
BRMR-M40S	M40X1,5	18,0-25,0	32,0	32,0	15,0	43,0	43,0	42,0	64,0	10
BRMR-M40	M40X1,5	22,0-32,0	40,0	40,0	15,0	43,0	43,0	52,0	68,0	5
BRMR-M50	M50X1,5	22,0-32,0	40,0	50,0	15,0	55,0	55,0	58,0	68,0	5

Pg Thread

CODE	THREAD SIZE	CLAMBLING RANGE (MM)	CONDUIT NOM. SIZE (MM)	TD (MM)	TL (MM)	SW UPPER BODY (MM)	SW LOWER BODY (MM)	SW CAP (MM)	H (MM)	QUANTITY (PC/ PACK)
BRPR-PG7	PG-7	3,0-6,5	12,0	12,5	12,0	20,0	14,0	24,0	47,0	50
BRPR-PG9	PG-9	4,0-8,0	16,0	15,2	12,0	22,0	17,0	26,0	48,0	50
BRPR-PG11	PG-11	5,0-10,0	16,0	18,6	12,0	24,0	20,0	26,0	50,0	50
BRPR-PG13	PG-13,5	6,0-12,0	20,0	20,4	12,0	26,0	22,0	29,0	53,0	50
BRPR-PG16	PG-16	10,0-14,0	20,0	22,5	12,0	26,0	24,0	29,0	55,0	25
BRPR-PG21	PG-21	13,0-18,0	25,0	28,3	15,0	33,0	30,0	35,0	60,0	10
BRPR-PG29	PG-29	18,0-25,0	32,0	37,0	15,0	44,0	40,0	42,0	64,0	5
BRPR-PG36	PG-36	22,0-32,0	40,0	47,0	15,0	52,0	50,0	52,0	68,0	5
BRPR-PG42	PG-42	30,0-38,0	50,0	54,0	15,0	60,0	57,0	58,0	70,0	5
BRPR-PG48	PG-48	34,0-44,0	50,0	59,3	15,0	72,0	64,0	68,0	70,0	5

Npt Thread

CODE	THREAD SIZE	CLAMBLING RANGE (MM)	CONDUIT NOM. SIZE (MM)	TD (MM)	TL (MM)	SW UPPER BODY (MM)	SW LOWER BODY (MM)	SW CAP (MM)	H (MM)	QUANTITY (PC/ PACK)
BRNR-3/8S	3/8"	3,0-6,5	12,0	17,0	12,0	20,0	19,0	24,0	47,0	50
BRNR-3/8	3/8"	4,0-8,0	16,0	17,0	12,0	22,0	20,0	26,0	48,0	50
BRNR-1/2S	1/2"	5,0-10,0	16,0	21,3	12,0	24,0	22,0	26,0	50,0	50
BRNR-1/2	1/2"	6,0-12,0	20,0	21,3	12,0	26,0	24,0	29,0	53,0	50
BRNR-3/4	3/4"	10,0-14,0	25,0	26,6	12,0	33,0	30,0	35,0	60,0	25
BRNR-1	1"	13,0-18,0	32,0	33,4	15,0	40,0	43,0	42,0	64,0	10
BRNR-11/4	1 1/4"	18,0-25,0	40,0	42,0	15,0	50,0	50,0	52,0	68,0	5
BRNR-11/2	1 1/2"	22,0-32,0	50,0	48,2	15,0	58,0	58,0	58,0	70,0	5
BRNR-2	2"	34,0-44,0	50,0	60,3	15,0	70,0	64,0	68,0	70,0	5