


Compression Swivel Connector Female Type

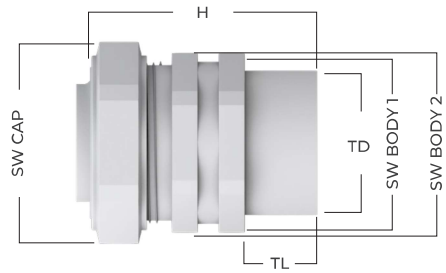

TECHNICAL INFORMATION

- CAP :** NICKEL PLATED BRASS (NPB)
- BODY :** NICKEL PLATED BRASS (NPB)
- STANDARD :** EN 62444 / 50262
- THREAD TYPE :** METRIC EN 60423 , PG DIN 40430 , NPT ANSI B1.20.1
- PROTECTION CLASS :** IP 67 / IP 68
- OPERATING TEMPERATURE :** -40°C / +120°C
- FLAMMABILITY CLASS :** UL94 V2
- COLOR :** SELF-COLOURED
- SEAL TYPE :** PA6

FEATURES

- BEST GRADE MATERIAL | HIGH MECHANICAL STRENGTH
- WATERPROOF | VIBRATION RESISTANT

APPLICATIONS

- MACHINE BUILDINGS | AUTOMATION SYSTEMS
- CONSTRUCTION | MARINE , SHIPYARD

Metric Thread

| CODE | THREAD SIZE | CONDUIT NOM. SIZE (MM) | TD (MM) | TL (MM) | SW BODY 1 (MM) | SW BODY 2 (MM) | SW CAP (MM) | H (MM) | QUANTITY (PC/PACK) |
|-------------|-------------|------------------------|---------|---------|----------------|----------------|-------------|--------|--------------------|
| BDMR-M16S-F | M16X1,5 | 12,0 | 16,0 | 12,0 | 20,0 | 20,0 | 24,0 | 29,8 | 50 |
| BDMR-M16-F | M16X1,5 | 16,0 | 16,0 | 12,0 | 24,0 | 24,0 | 26,0 | 33,0 | 50 |
| BDMR-M20S-F | M20X1,5 | 16,0 | 20,0 | 12,0 | 26,0 | 26,0 | 26,0 | 33,5 | 50 |
| BDMR-M20-F | M20X1,5 | 20,0 | 20,0 | 12,0 | 26,0 | 26,0 | 29,0 | 33,5 | 50 |
| BDMR-M25-F | M25X1,5 | 25,0 | 25,0 | 14,0 | 33,0 | 29,0 | 35,0 | 40,5 | 25 |
| BDMR-M32-F | M32X1,5 | 32,0 | 32,0 | 15,0 | 40,0 | 38,0 | 42,0 | 45,8 | 10 |
| BDMR-M40-F | M40X1,5 | 40,0 | 40,0 | 16,0 | 50,0 | 48,0 | 52,0 | 47,5 | 5 |
| BDMR-M50-F | M50X1,5 | 50,0 | 50,0 | 18,0 | 58,0 | 58,0 | 58,0 | 53,0 | 5 |

Npt Thread

| CODE | THREAD SIZE | CONDUIT NOM. SIZE (MM) | TD (MM) | TL (MM) | SW BODY 1 (MM) | SW BODY 2 (MM) | SW CAP (MM) | H (MM) | QUANTITY (PC/PACK) |
|--------------|-------------|------------------------|---------|---------|----------------|----------------|-------------|--------|--------------------|
| BDNR-3/8-F | 3/8" | 16,0 | 17,0 | 10,0 | 22,0 | 22,0 | 26,0 | 33,0 | 50 |
| BDNR-1/2S-F | 1/2" | 16,0 | 21,3 | 12,0 | 24,0 | 24,0 | 26,0 | 33,0 | 50 |
| BDNR-1/2-F | 1/2" | 20,0 | 21,3 | 12,0 | 26,0 | 26,0 | 29,0 | 33,5 | 50 |
| BDNR-3/4-F | 3/4" | 25,0 | 26,6 | 12,0 | 33,0 | 29,0 | 35,0 | 40,5 | 25 |
| BDNR-1-F | 1" | 32,0 | 33,4 | 14,0 | 40,0 | 38,0 | 42,0 | 45,8 | 10 |
| BDNR-1 1/4-F | 1 1/4" | 40,0 | 42,0 | 16,0 | 50,0 | 48,0 | 52,0 | 47,5 | 5 |
| BDNR-1 1/2-F | 1 1/2" | 50,0 | 48,2 | 18,0 | 58,0 | 58,0 | 58,0 | 53,0 | 5 |
| BDNR-2-F | 2" | 63,0 | 60,3 | 20,0 | 70,0 | 70,0 | 70,0 | 58,8 | 4 |