


# Compression Swivel Connector Male

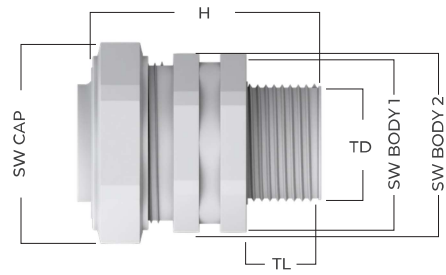

## TECHNICAL INFORMATION

- CAP :** NICKEL PLATED BRASS ( NPB )
- BODY :** NICKEL PLATED BRASS ( NPB )
- STANDARD :** EN 62444 / 50262
- THREAD TYPE :** METRIC EN 60423 , PG DIN 40430 , NPT ANSI B1.20.1
- PROTECTION CLASS :** IP 67 / IP 68
- OPERATING TEMPERATURE :** -40°C / +120°C
- FLAMMABILITY CLASS :** UL94 V2
- COLOR :** SELF-COLOURED
- SEAL TYPE :** PA6
- O-RING :** NBR

## FEATURES

- BEST GRADE MATERIAL | HIGH MECHANICAL STRENGTH
- WATERPROOF | VIBRATION RESISTANT

## APPLICATIONS

- MACHINE BUILDINGS | AUTOMATION SYSTEMS
- CONSTRUCTION | MARINE , SHIPYARD

### Metric Thread

CODE	THREAD SIZE	CONDUIT NOM. SIZE (MM)	TD (MM)	TL (MM)	SW BODY 1 (MM)	SW BODY 2 (MM)	SW CAP (MM)	H (MM)	QUANTITY (PC/PACK)
BDMR-M16S	M16X1,5	12,0	16,0	12,0	20,0	20,0	24,0	29,8	50
BDMR-M16	M16X1,5	16,0	16,0	12,0	24,0	24,0	26,0	33,0	50
BDMR-M20S	M20X1,5	16,0	20,0	12,0	26,0	26,0	26,0	33,5	50
BDMR-M20	M20X1,5	20,0	20,0	12,0	26,0	26,0	29,0	33,5	50
BDMR-M25	M25X1,5	25,0	25,0	14,0	33,0	29,0	35,0	40,5	25
BDMR-M32	M32X1,5	32,0	32,0	15,0	40,0	38,0	42,0	45,8	10
BDMR-M40	M40X1,5	40,0	40,0	16,0	50,0	48,0	52,0	47,5	5
BDMR-M50	M50X1,5	50,0	50,0	18,0	58,0	58,0	58,0	53,0	5

### Npt Thread

CODE	THREAD SIZE	CONDUIT NOM. SIZE (MM)	TD (MM)	TL (MM)	SW BODY 1 (MM)	SW BODY 2 (MM)	SW CAP (MM)	H (MM)	QUANTITY (PC/PACK)
BDNR-3/8	3/8"	16,0	17,0	10,0	22,0	22,0	26,0	33,0	50
BDNR-1/2S	1/2"	16,0	21,3	12,0	24,0	24,0	26,0	33,0	50
BDNR-1/2	1/2"	20,0	21,3	12,0	26,0	26,0	29,0	33,5	50
BDNR-3/4	3/4"	25,0	26,6	12,0	33,0	29,0	35,0	40,5	25
BDNR-1	1"	32,0	33,4	14,0	40,0	38,0	42,0	45,8	10
BDNR-1 1/4	1 1/4"	40,0	42,0	16,0	50,0	48,0	52,0	47,5	5
BDNR-1 1/2	1 1/2"	50,0	48,2	18,0	58,0	58,0	58,0	53,0	5
BDNR-2	2"	63,0	60,3	20,0	70,0	70,0	70,0	58,8	4