


# Halogenfree Flexible Conduit

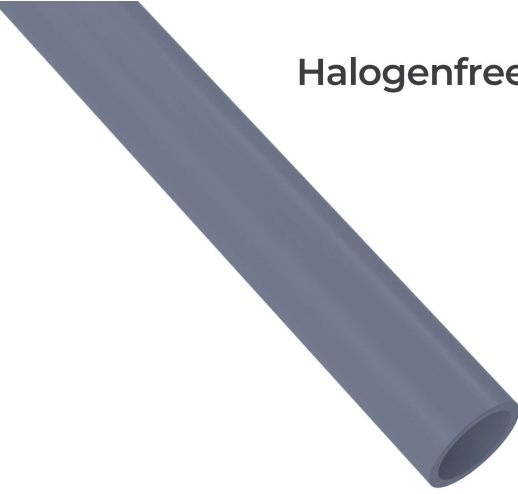

## TECHNICAL INFORMATION

**MATERIAL :** POLYPROPYLENE

**STANDARD :** EN 61386-21

**PROTECTION CLASS :** IP 54 / IP 65

**OPERATING TEMPERATURE:** -25C / +60C

**FLAMMABILITY CLASS :** UL94 HB

**COLOR :** GREY ( RAL 7001 ) , BLACK ( RAL 9005 ) , LIGHT GREY ( RAL 7035 )

**COMPRESSION STRENGTH :** LIGHT : 320N , MEDIUM : 750N , HEAVY : 1250N

**PULL-OFF (TENSILE) STRENGTH :**

**CERTIFICATE :** CE, ROHS

## FEATURES

HALOGEN FREE | SULPHUR FREE | PHOSPHORUS FREE |  
EASY INSTALLATION | BEST GRADE MATERIAL | RESISTANT  
TO ACID AND SOLVENT

## APPLICATIONS

RESIDENTIAL BUILDING | COMMERCIAL BUILDINGS |  
INSIDE CONCRETE & OUTSIDE CONCRETE | UNDER  
FLOOR INSTALLATIONS

### Light Serie 320 N

GREY CODE	BLACK CODE	LIGHT GREY CODE	SIZE	INSIDE DIA. (MM)	OUTSIDE DIA. (MM)	PACK QTY (M)
THD-116-G	THD-116-S	THD-116-LG	16 MM	11,70	16,0	100
THD-120-G	THD-120-S	THD-120-LG	20 MM	14,20	20,0	100
THD-125-G	THD-125-S	THD-125-LG	25 MM	18,10	25,0	50
THD-132-G	THD-132-S	THD-132-LG	32 MM	24,20	32,0	50
THD-140-G	THD-140-S	THD-140-LG	40 MM	31,2	40,0	50
THD-150-G	THD-150-S	THD-150-LG	50 MM	39,6	50,0	25

### Medium Serie 750 N

GREY CODE	BLACK CODE	LIGHT GREY CODE	SIZE	INSIDE DIA. (MM)	OUTSIDE DIA. (MM)	PACK QTY (M)
THD-216-G	THD-216-S	THD-216-LG	16 MM	11,60	16,0	100
THD-220-G	THD-220-S	THD-220-LG	20 MM	14,10	20,0	100
THD-225-G	THD-225-S	THD-225-LG	25 MM	18,00	25,0	50
THD-232-G	THD-232-S	THD-232-LG	32 MM	24,10	32,0	50
THD-240-G	THD-240-S	THD-240-LG	40 MM	31,0	40,0	50
THD-250-G	THD-250-S	THD-250-LG	50 MM	39,3	50,0	25

### Heavy Serie 1250 N

GREY CODE	BLACK CODE	LIGHT GREY CODE	SIZE	INSIDE DIA. (MM)	OUTSIDE DIA. (MM)	PACK QTY (M)
THD-316-G	THD-350-S	THD-316-LG	16 MM	11,40	16,0	100
THD-320-G	THD-320-S	THD-320-LG	20 MM	14,00	20,0	100
THD-325-G	THD-325-S	THD-325-LG	25 MM	17,70	25,0	50
THD-332-G	THD-332-S	THD-332-LG	32 MM	24,00	32,0	50
THD-340-G	THD-340-S	THD-340-LG	40 MM	30,80	40,0	50
THD-350-G	THD-350-S	THD-350-LG	50 MM	39,00	50,0	25