


Railway Standard Braided Sleeving

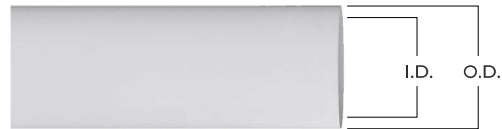

TECHNICAL INFORMATION

- MATERIAL :** POLYAMIDE
- MONOFIL DIA :** 0,22 MM , 0,25 MM
- STANDARD :** DIN 5510, EN 45545-2 (HL1 / HL2 / HL3)
- CERTIFICATE :** CE, ROHS
- OPERATING TEMPERATURE:** -40°C / +120°C (SHORT TERM +150C)
- COLOR :** GREY (RAL 7031) , BLACK (RAL 9011)
- FLAMMABILITY CLASS :** UL94 V2

FEATURES

- BEST GRADE MATERIAL | HALOGEN FREE | SULPHUR FREE
- | PHOSPHORUS FREE | ABRASION RESISTANT | BENZINE |
- SOLVENT AND ACID RESISTANT | UL 94 V2 FLAME RETARDANCY
- | SELF-EXTINGUISH | HIGH MECHANICAL STRENGTH | EASY
- INSTALLATION | UV RESISTANT (BLACK COLOUR)

APPLICATIONS

- MACHINE INDUSTRY | AUTOMATION SYSTEMS |
- AUTOMOTIVE | SOLAR SYSTEMS | CONSTRUCTION |
- ROBOT APPLICATIONS | SHIP INDUSTRY

BLACK CODE	GREY CODE	HOSE DIA.	MIN. EXPANSION DIA. (MM)	MAX. EXPANSION DIA. (MM)	REEL LENGTH (M)
AGRP-5-S	AGRP-5-G	5	3,0	8,0	100
AGRP-8-S	AGRP-8-G	8	5,0	16,0	100
AGRP-10-S	AGRP-10-G	10	7,0	14,0	100
AGRP-12-S	AGRP-12-G	12	8,0	24,0	100
AGRP-15-S	AGRP-15-G	15	11,0	20,0	100
AGRP-20-S	AGRP-20-G	20	19,0	28,0	100
AGRP-25-S	AGRP-25-G	25	21,0	34,0	50
AGRP-30-S	AGRP-30-G	30	25,0	40,0	50
AGRP-40-S	AGRP-40-G	40	31,0	55,0	50
AGRP-50-S	AGRP-50-G	50	40,0	68,0	50