


Stainless Steel Standart Cable Gland Metric Type

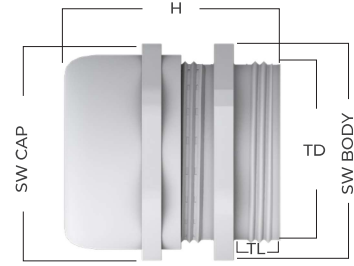

TECHNICAL INFORMATION

- MATERIAL :** STAINLESS STEEL AISI 303 (AISI 316L IS OPTIONAL)
- STANDARD :** EN 62444
- THREAD TYPE :** METRIC EN 60423
- PROTECTION CLASS :** IP 68 / 5 BAR
- OPERATING TEMPERATURE :** -30°C /+100°C,-40°C /+150°C (SHORT TERM)
- FLAMMABILITY CLASS :** UL94V2
- COLOR :** SELF - COLOURED
- SEAL :** TPV, (CHLOROPRENE IS OPTIONAL)
- INSERT :** POLYAMIDE 6
- O-RING :** NBR
- CERTIFICATE :** CE, ROHS

FEATURES

- GOOD CLAMMING RANGE | HALOGEN FREE | SULPHUR FREE
- PHOSPHORUS FREE | UL 94 V2 FLAME RETARDANCY | HIGH MECHANICAL STRENGTH
- NO CORROSION | EASY INSTALLATION | HIGH STRAIN RELIEF
- BEST GRADE MATERIAL | ACID RESISTANT | GOOD CHEMICAL RESISTANT

APPLICATIONS

- MACHINE BUILDINGS | AUTOMATION SYSTEMS
- FOOD INDUSTRY | CHEMICAL INDUSTRY | LIGHTING | TUNNEL LIGHTING

Standard Thread								
CODE	SIZE	CLAMMING RANGE (MM)	TD (MM)	TL (MM)	SW BODY (MM)	SW CAP (MM)	H (MM)	
TSSMR-0S	M12X1,5	3,0-6,5	12,0	6,0	14,0	14,0	22,0	50
TSSMR-01	M16X1,5	4,0-8,0	16,0	7,0	18,0	17,0	23,0	50
TSSMR-01S	M16X1,5	5,0-10,0	16,0	7,0	20,0	20,0	25,0	50
TSSMR-02	M20X1,5	6,0-12,0	20,0	8,0	22,0	22,0	27,0	50
TSSMR-02S	M20X1,5	10,0-14,0	20,0	8,0	22,0	22,0	27,0	50
TSSMR-03	M25X1,5	13,0-18,0	25,0	8,0	27,0	24,0	28,0	25
TSSMR-04	M32X1,5	18,0-25,0	32,0	9,0	36,0	30,0	32,0	25
TSSMR-05	M40X1,5	22,0-32,0	40,0	9,0	46,0	41,0	38,0	20
TSSMR-06	M50X1,5	30,0-38,0	50,0	9,0	55,0	50,0	43,0	15
TSSMR-07	M63X1,5	34,0-44,0	63,0	14,0	68,0	64,0	48,0	12
TSSMR-08	M63X1,5	37,0-53,0	63,0	16,0	74,0	77,0	54,0	10
TSSMR-09	M72X2,0	56,0-61,0	72,0	16,0	77,0	77,0	55,0	4
TSSMR-10	M80X2,0	60,0-66,0	80,0	16,0	90,0	90,0	57,0	2

Long Thread								
CODE	SIZE	CLAMMING RANGE (MM)	TD (MM)	TL (MM)	SW BODY (MM)	SW CAP (MM)	H (MM)	
TSSMRL-0S	M12X1,5	3,0-6,5	12,0	12,0	14,0	14,0	22,0	50
TSSMRL-01	M16X1,5	4,0-8,0	16,0	12,0	18,0	17,0	23,0	50
TSSMRL-01S	M16X1,5	5,0-10,0	16,0	12,0	20,0	20,0	25,0	50
TSSMRL-02	M20X1,5	6,0-12,0	20,0	12,0	22,0	22,0	27,0	50
TSSMRL-02S	M20X1,5	10,0-14,0	20,0	12,0	22,0	22,0	27,0	50
TSSMRL-03	M25X1,5	13,0-18,0	25,0	12,0	27,0	24,0	28,0	25
TSSMRL-04	M32X1,5	18,0-25,0	32,0	14,0	36,0	30,0	32,0	25
TSSMRL-05	M40X1,5	22,0-32,0	40,0	14,0	46,0	41,0	38,0	20
TSSMRL-06	M50X1,5	30,0-38,0	50,0	14,0	55,0	50,0	43,0	15
TSSMRL-07	M63X1,5	34,0-44,0	63,0	18,0	70,0	65,0	48,0	12